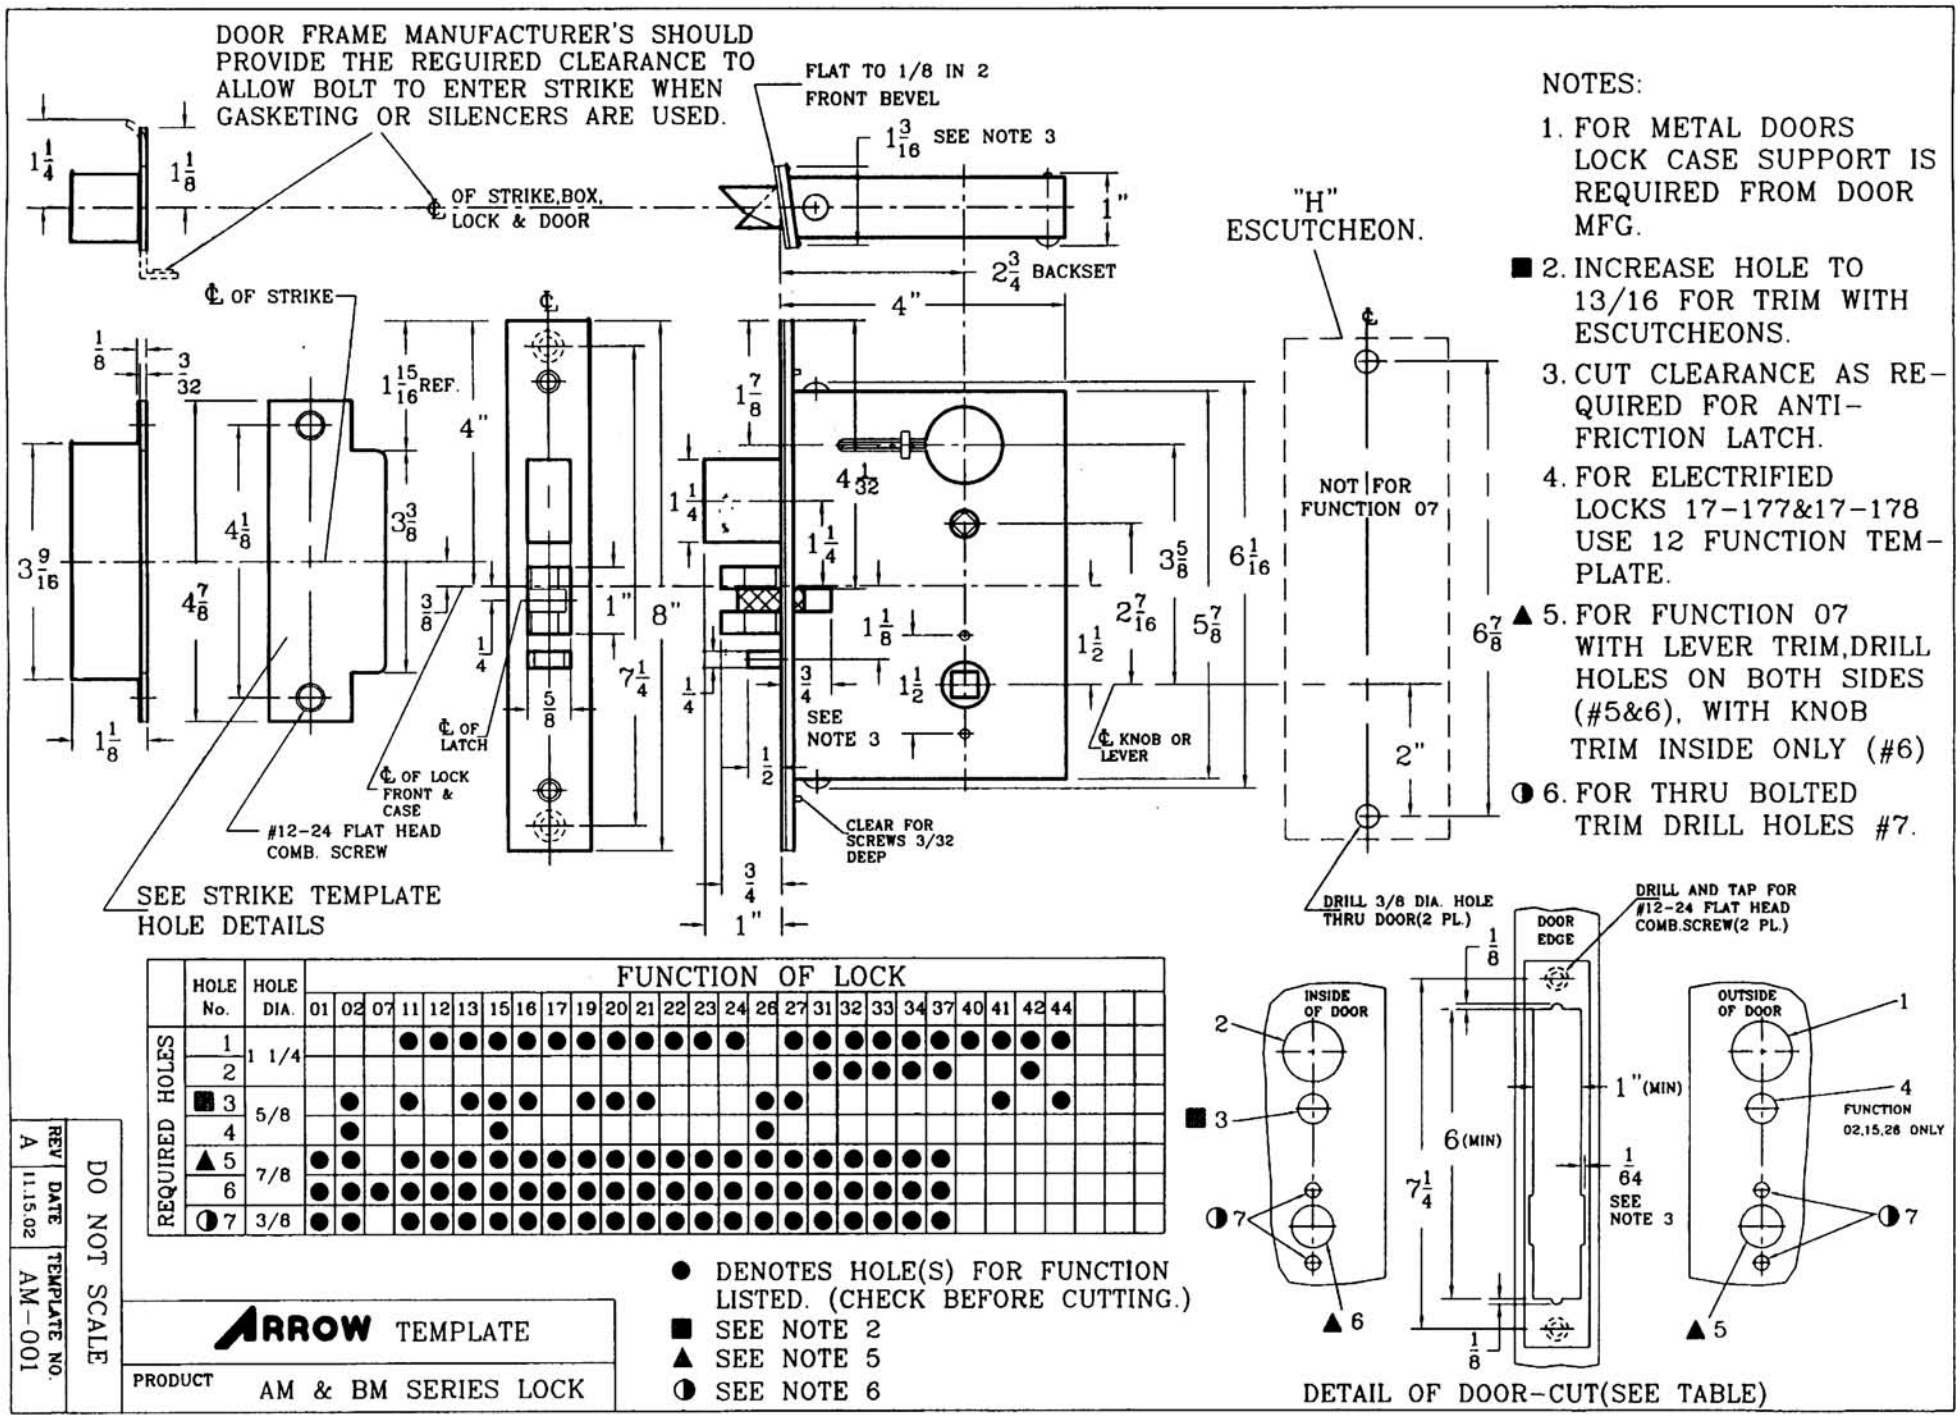

NOTES:

1. FOR METAL DOORS LOCK CASE SUPPORT IS REQUIRED FROM DOOR MFG.
2. ■ INCREASE HOLE TO 13/16 FOR TRIM WITH ESCUTCHEONS.
3. CUT CLEARANCE AS REQUIRED FOR ANTI-FRICTION LATCH.
4. FOR ELECTRIFIED LOCKS 17-177&17-178 USE 12 FUNCTION TEMPLATE.
5. ▲ FOR FUNCTION 07 WITH LEVER TRIM,DRILL HOLES ON BOTH SIDES (#5&6), WITH KNOB TRIM INSIDE ONLY (#6)
6. ◑ FOR THRU BOLTED TRIM DRILL HOLES #7.

REQUIRED HOLES	HOLE No.	HOLE DIA.	FUNCTION OF LOCK: 01	02	07	11	12	13	15	16	17	19	20	21	22	23	24	26	27	31	32	33	34	37	40	41	42	44
	1	1 1/4				●	●	●	●	●	●	●	●	●	●	●	●		●	●	●	●	●	●	●	●	●
	2																			●	●	●	●	●		●		
	■ 3	5/8		●		●		●	●	●		●	●	●				●	●							●		●
	4			●					●									●										
	▲ 5	7/8	●	●		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●				
	6		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●				
	◑ 7	3/8	●	●		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●				

● DENOTES HOLE(S) FOR FUNCTION LISTED. (CHECK BEFORE CUTTING.)
■ SEE NOTE 2
▲ SEE NOTE 5
◑ SEE NOTE 6

REV	DATE	TEMPLATE NO.
A	11.15.02	AM-001

DO NOT SCALE

ARROW TEMPLATE

PRODUCT AM & BM SERIES LOCK